


Performance

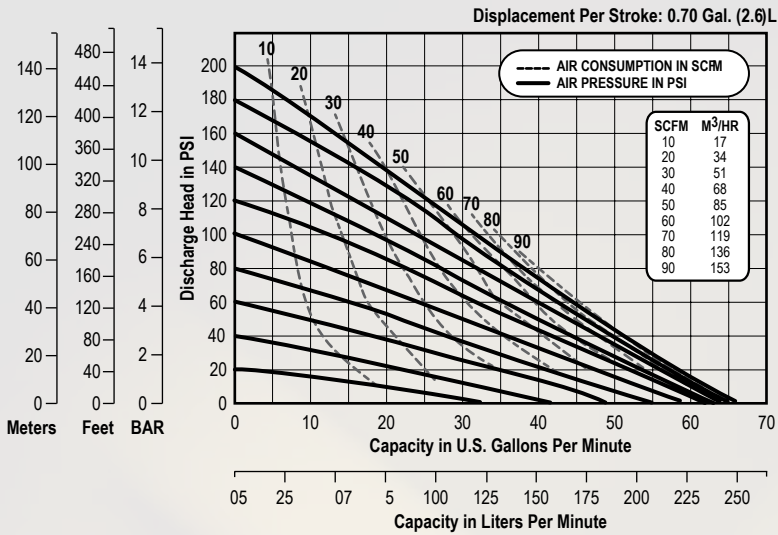

NOTE: Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

Specifications

- Flow Rate**
Adjustable to 0-69 gpm (261 lpm)
- Port Size**
Suction 2.0" ANSI
Discharge 2.0" ANSI
- Air Inlet** 0.5" NPT
- Air Exhaust** 1.0" NPT
- Suction Lift**
Dry 20' (6.09 m)
Wet 25' (7.62 m)
- Max Solid Size (Diameter)**
..... 0.25" (6.35mm)
- Shipping Weights**
Stainless Steel 91 lbs (41 kg)

Dimensions

