


1/4" Elima-Matic Bolted Plastic - ATEX

with Non-Metallic Center Sections

E6

Performance

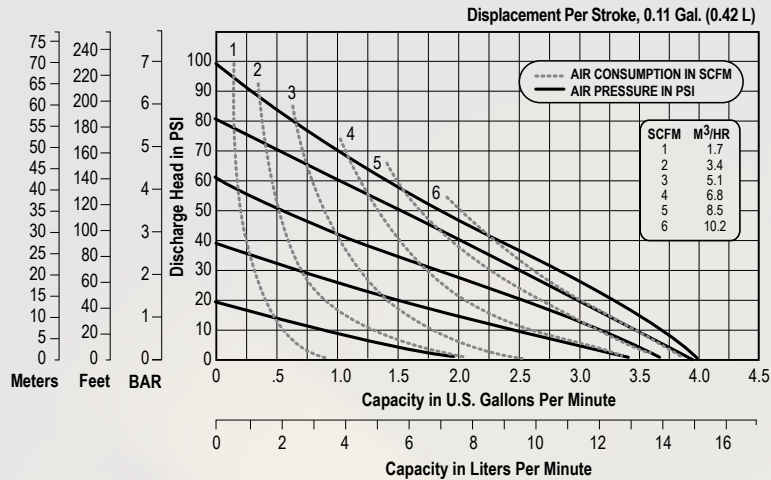

NOTE: Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

Specifications

- Flow Rate**
Adjustable to 0-4 gpm (15 lpm)
- Port Size**
Suction 1/4" NPT (BSP)
Discharge 1/4" NPT (BSP)
- Air Inlet** 1/4" NPT
- Air Exhaust** 1/4" NPT
- Suction Lift**
Dry 8' (2.44 m)
- Max Solid Size (Diameter)**
. 1/32" (1 mm)
- Max Noise Level** 78 dB(A)
- Shipping Weights**
Conductive Acetal 3 lbs (1.40 kg)

Dimensions

