


Performance

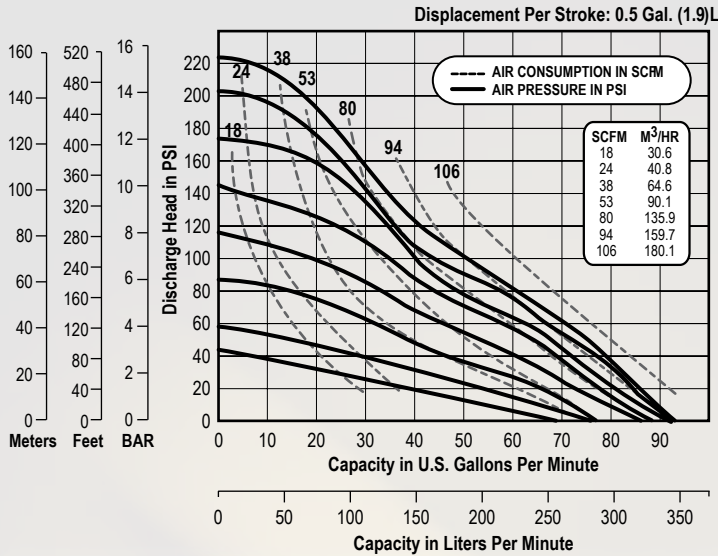

NOTE: Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

Specifications

- Flow Rate**
Adjustable to 0-90 gpm (341 lpm)
- Port Size**
Suction 2.0" NPTF
Discharge 2.0" NPTF
- Air Inlet** 0.75" NPTF
Air Exhaust 0.75" BSP
- Suction Lift**
Dry 20' (6.09 m)
Wet 25' (7.62 m)
- Max Solid Size (Diameter)**
. 0.25"(6mm)
- Shipping Weights**
Aluminum 147 lbs (67kg)
Stainless Steel 165 lbs (75 kg)

Dimensions

