


SludgeMaster™ Air-Driven High-Flow Pump

SM

Performance

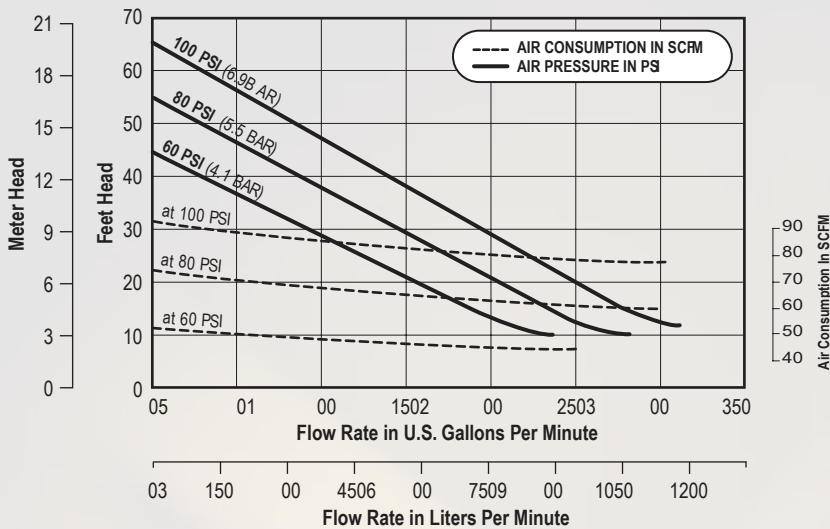


NOTE: Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

Specifications

- Flow Rate**
Adjustable to 300 gpm (1,140 lpm)
- Maximum Discharge Pressure**
..... 28 psi (2 bar)
- Max. Solid Particle Size** 1.5" 38 mm
- Air Inlet**50" NPT
- Exhaust Outlet**75" NPT
- Fluid Outlet** 3" NPT (female)
- Weight**59 lbs (26.76 kg)

Dimensions

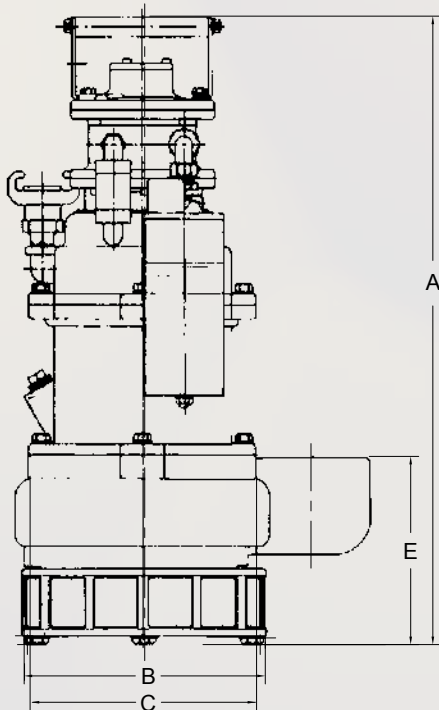

EAC CE

VERSAMATIC

Warren Rupp, Inc. • A Unit of IDEX Corporation
800 North Main Street, Mansfield, OH 44902 USA
Phone: 419.526.7296 • Fax: 419.526.7289 • www.versamatic.com

SludgeMaster-rev0817