

E2 2" Aluminum Bolted Pumps Specifications and Performance

SPECIFICATIONS

E2

FLOW RATE (Adjustable) 0-174 gpm (658 lpm)

PORT SIZE

Inlet and Outlet 2.0" NPT (BSP)

AIR INLET 0.50" NPT

AIR EXHAUST 0.75" NPT

SUCTION LIFT ... 20' Dry/25' Wet (6.09m/7.62m)

Teflon®..... 10' Dry/20' Wet (3.04m/6.09m)

MAX. PARTICLE SIZE (Dia.) 0.43"(11mm)

SHIPPING WEIGHT


Aluminum 73.5 lbs (33 kg)



PERFORMANCE

Determined by actual flow meter tests.

E2

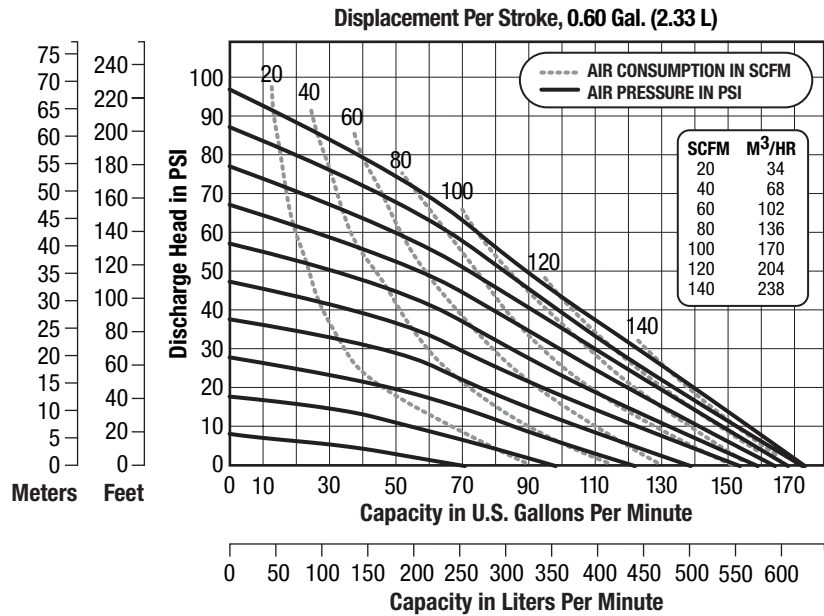

NOTE: For E2AL pumps fitted with Teflon® diaphragms, reduce water discharge figures by 20%. Suction lift is reduced to 10' (3.05m) dry and 20' (6.10m) wet.

CAUTION: Do not exceed 125 psig (8.5 bars) air supply or liquid pressure.

DIMENSIONS

Consult factory for certified drawings.

E2

