


## Performance

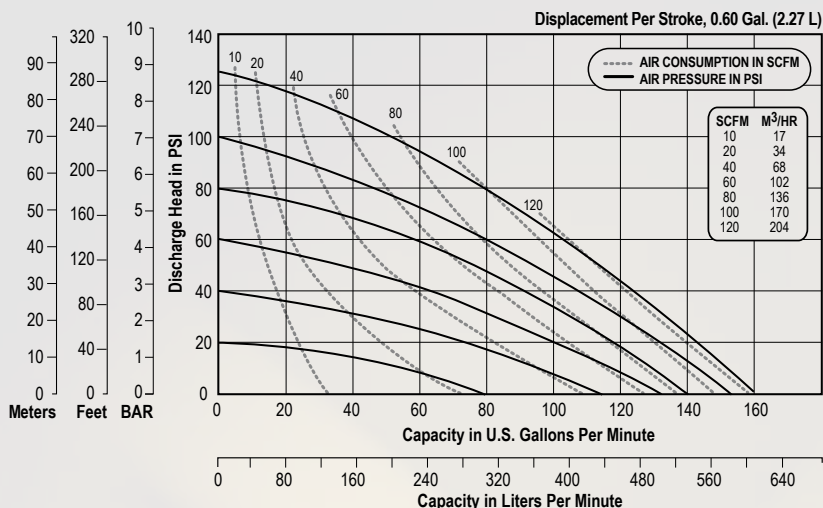

**NOTE:** Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

## Specifications

### Flow Rate

Adjustable to . . . . . 0-163 gpm (617 lpm)

### Port Size

Suction . . . . . 2" NPT

Discharge . . . . . 2" NPT

**Air Inlet** . . . . . 1/2" NPT

**Air Exhaust** . . . . . 1" NPT

### Suction Lift

Dry . . . . . 18' (5.5 m)

Wet . . . . . 32' (9.8 m)

### Max Solid Size (Diameter)

. . . . . 7/16" (11.1 mm)

**Max Noise Level** . . . . . 92 dB(A)

### Shipping Weights

Aluminum . . . . . 81 lbs (36.7 kg)

## Dimensions

