


# 2" Elima-Matic Metallic Clamped – ATEX

with Metallic Center Section

# E2

## Performance

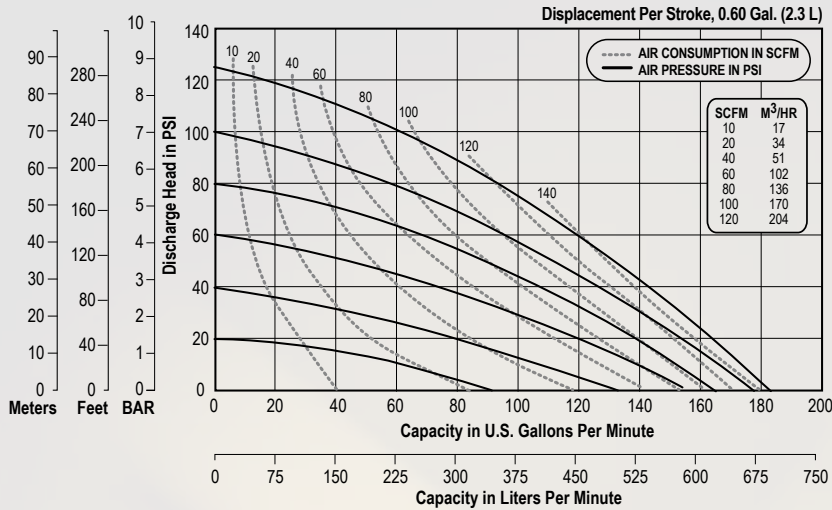

**NOTE:** Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

## Specifications

- Flow Rate**  
Adjustable to . . . . . 0-185 gpm (700 lpm)
- Port Size**  
Suction . . . . . 2" NPT  
Discharge . . . . . 2" NPT
- Air Inlet** . . . . . 1/2" NPT
- Air Exhaust** . . . . . 1" NPT
- Suction Lift**  
Dry . . . . . 17' (5.2 m)  
Wet . . . . . 32' (9.8 m)
- Max Solid Size (Diameter)**  
. . . . . 1/4" (6.4 mm)
- Max Noise Level** . . . . . 96 dB(A)
- Shipping Weights**  
Aluminum . . . . . 65 lbs (29.5 kg)  
Cast Iron . . . . . 113 lbs (51.3 kg)  
Stainless . . . . . 106 lbs (48.1 kg)  
\*\* Stainless Center add . . . . . 31 lbs. (68.3 kg)

## Dimensions

