# 2” Elima-Matic Metallic Food Processing – ATEX
with Metallic Center Section

**E2**

## Performance

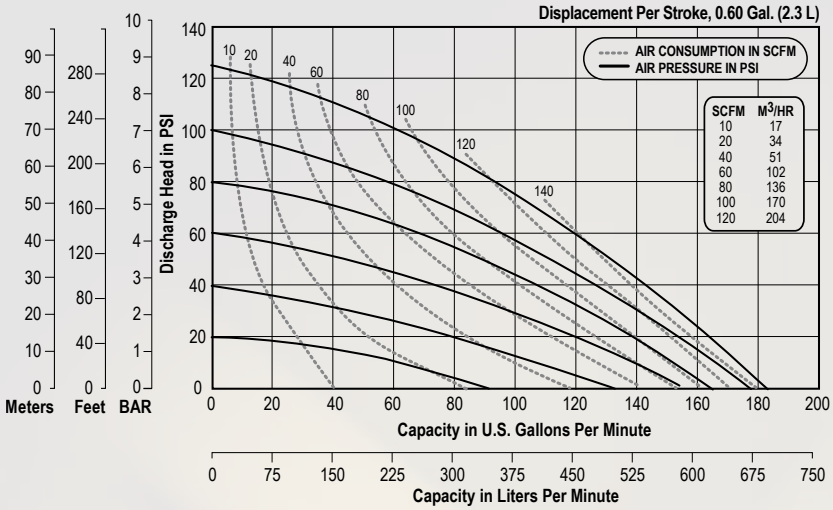


**NOTE:** *Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.*

## Specifications

**Flow Rate**
Adjustable to . . . . . 0-185 gpm (700 lpm)
**Port Size**
Suction . . . . . 2½" Tri-Clamp
Discharge . . . . . 2½" Tri-Clamp
**Air Inlet** . . . . . 1/2" NPT
**Air Exhaust** . . . . . 1" NPT
**Suction Lift**
Dry . . . . . .17' (5.1 m)
Wet . . . . . .32' (9.5 m)
**Max Solid Size** (Diameter)
. . . . . 1/4" (7.6 mm)
**Max Noise Level** . . . . . 96 dB(A)
**Shipping Weights**
Stainless. . . . . .106 lbs (48.1 kg)

## Dimensions

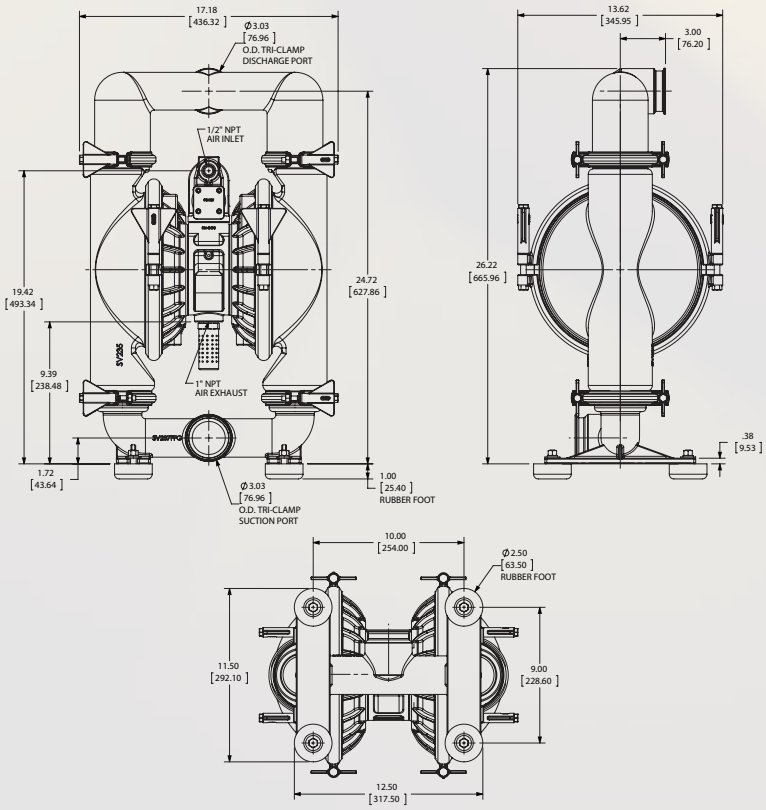


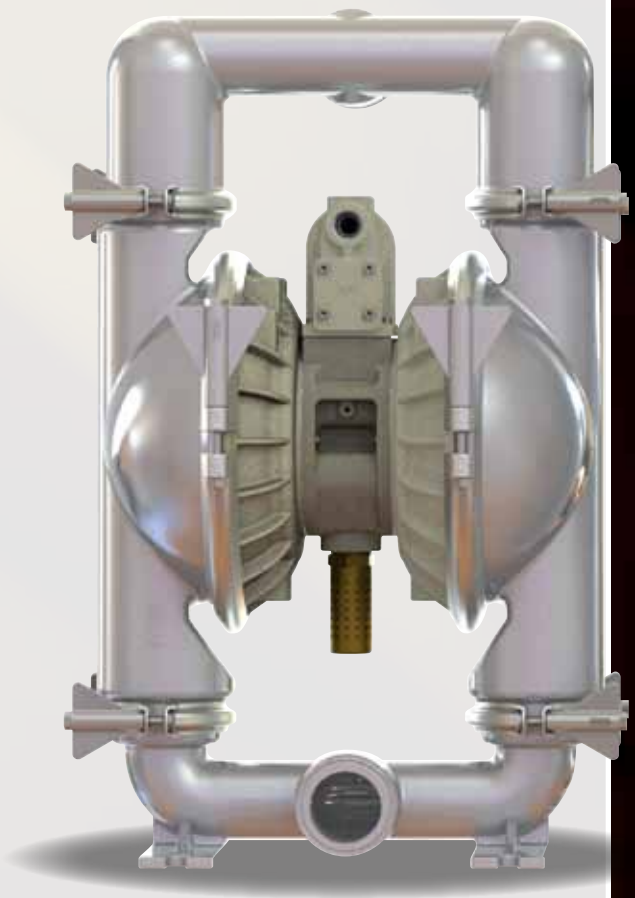


VERSA-MATIC®
Warren Rupp, Inc. • A Unit of IDEX Corporation
800 North Main Street, Mansfield, OH 44902 USA
Phone: 419.526.7296 • Fax: 419.526.7289 • www.versamatic.com