


Performance

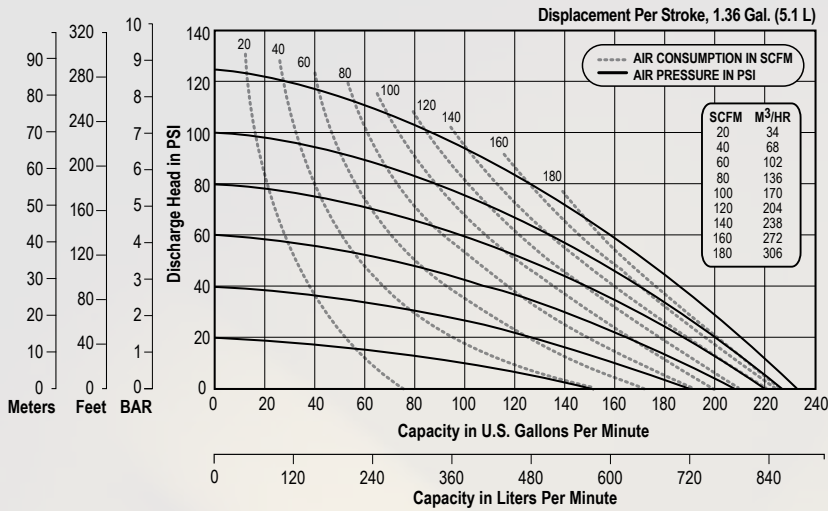

NOTE: Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

Specifications

Flow Rate

Adjustable to 0-234 gpm (886 lpm)

Port Size

Suction 3" TRI-CLAMP

Discharge 3" TRI-CLAMP

Air Inlet 1/2" NPT

Air Exhaust 1" NPT

Suction Lift

Dry20' (6.1 m)

Wet32' (9.8 m)

Max Solid Size (Diameter)

. 3/8" (9.5 mm)

Max Noise Level 96 dB(A)

Shipping Weights

Stainless 189 lbs (86 kg)

** Stainless Center add 50 lbs. (22.7 kg)

Dimensions

