


1 1/2" Elima-Matic Bolted Non-Metallic with Metallic Center Section

E4

Performance

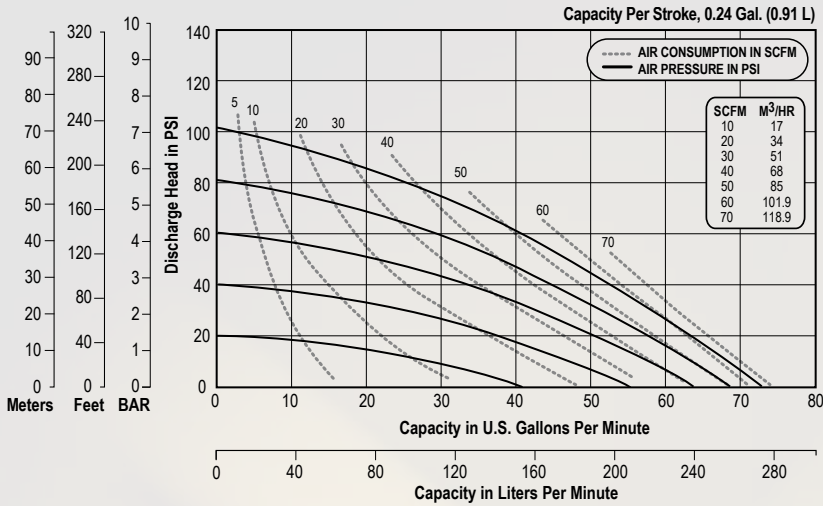

NOTE: Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

Specifications

Flow Rate

Adjustable to 0-75 gpm (284 lpm)

Port Size

Suction 1 1/2" ANSI

Discharge 1 1/2" ANSI

Air Inlet 1/2" NPT

Air Exhaust 3/4" NPT

Suction Lift

Dry 19' (5.8 m)

Wet 31' (9.4 m)

Max Solid Size (Diameter)

. 3/16" (4.76 mm)

Max Noise Level 89 dB(A)

Shipping Weights

Conductive Polypropylene . . . 55 lbs (25 kg)

Dimensions

