

E5 1/2" Bolted Metallic Pumps Specifications and Performance

SPECIFICATIONS

E5


FLOW RATE (Adjustable) 0-14 gpm (53 lpm)
PORT SIZE
 Inlet & Outlet 0.50" NPT
AIR INLET 0.375" NPT
AIR EXHAUST 0.375" NPT
SUCTION LIFT.. 15' Dry/25' Wet (6.096m/7.62m)
 Teflon® 5' Dry/10' Wet (1.52m/3.048m)
MAX. PARTICLE SIZE (Dia.) 0.0625" (1.6mm)
SHIPPING WEIGHTS
 Stainless Steel 18 lbs (8.17 kg)
 Hastelloy C 18 lbs (8.17 kg)
 Aluminum 15 lbs (6.8 kg)



PERFORMANCE

Determined by actual flow meter tests.

E5

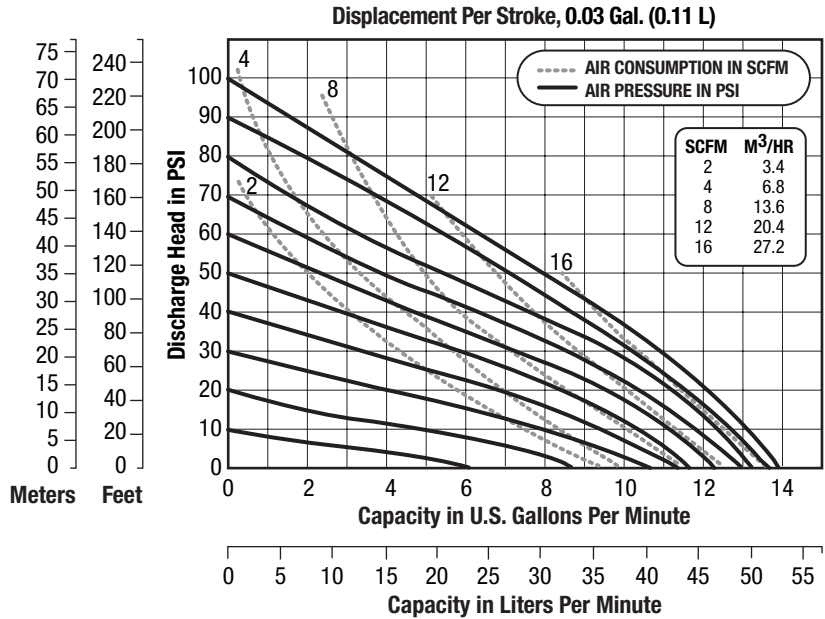

CAUTION: Do not exceed 100 psig (6.9 bars) air supply or liquid pressure.

DIMENSIONS

Consult factory for certified drawings.

E5

