



E3 3" Food Processing Pump Specifications and Performance

SPECIFICATIONS E3FDA

FLOW RATE (Adjustable) 0-260 gpm (984 lpm)
PORT SIZE
 Inlet and Outlet 3" Tri-Clamp
AIR INLET 0.5" NPT
AIR EXHAUST 1.0" NPT
SUCTION LIFT 20' Dry/25' Wet (6.10m/7.62m)
 Teflon® 10' Dry/20' Wet (3.05m/6.10m)
MAX. PARTICLE SIZE (Dia.) 0.375" (9.52mm)
SHIPPING WEIGHT
 Stainless Steel 210 lbs (95.25 kg)

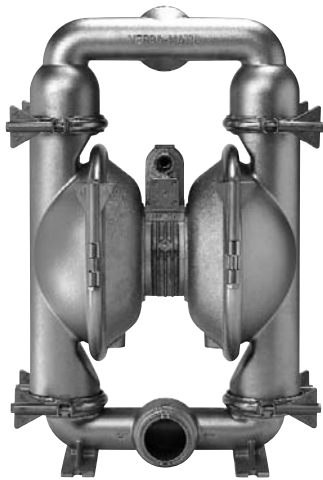

PERFORMANCE Determined by actual flow meter tests. E3FDA

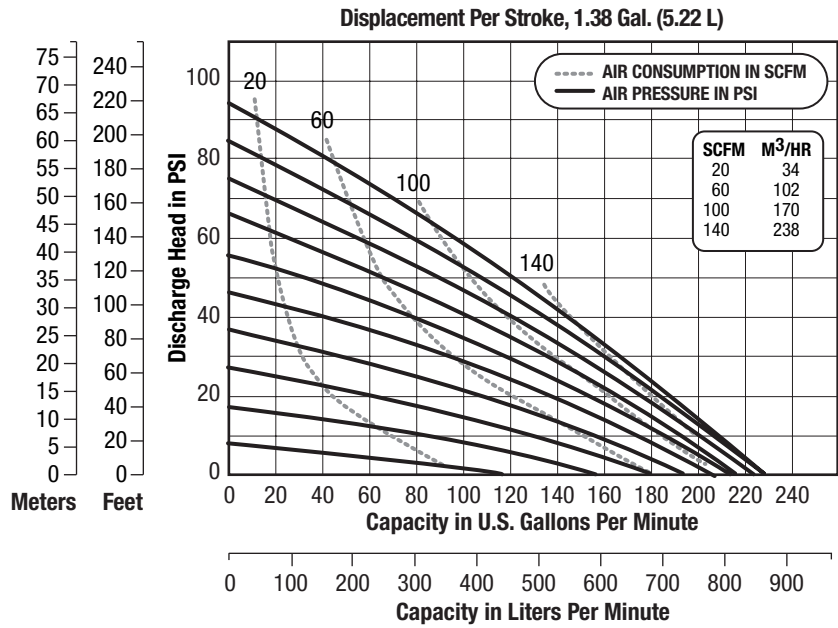

NOTE: For E3 pumps fitted with Teflon® diaphragms, reduce water discharge figures by 20%. Suction lift is reduced to 10' (3.05m) dry and 20' (6.10m) wet.

CAUTION: Do not exceed 125 psig (8.5 bars) air supply or liquid pressure.

DIMENSIONS Consult factory for certified drawings. E3FDA

